



tissin

Valve Position Transmitter TS500/TS510/TS515 Series

- 2 wire connection type
- LCD displays current output signal
- Easy and simple setting with 2 buttons
- High accuracy and reliability

Valve Position Transmitter TS500 Series

■ Description


TS500 Series is 2 wire type transmitter which transmits 4 ~ 20 mA DC signal according to changes in valve or damper position.

■ Certified

CE IP₆₇



■ Dimension [Unit:mm]

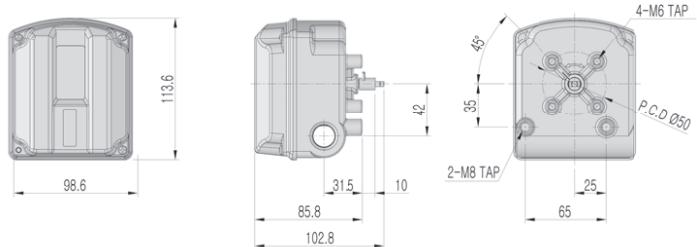

■ Features

- ✚ 2 wire connection type
- ✚ LCD displays current output signal
- ✚ Easy and simple setting with 2 buttons
- ✚ High accuracy and reliability
- ✚ Two or five points smart setup

■ Specifications

Model	TS500
Connection type	2 Wire
Supply voltage	9~28V DC
Output signal	4~20mA
Ingress protection	IP67
Conduit entry	2 x NPT1/2, G1/2, M20
Ambient Temp.	-40°C~85°C
Linearity	±1% F.S.
Hysteresis	±0.2% F.S.
Sensitivity	±0.2% F.S.
Material	Aluminum die cast
Painting	Polyester powder coating
Weight	0.6kg

■ Product code

Model	TS500			
Motion type	Linear	L		
	Rotary	R		
Conduit entry	NPT1/2	1		
	M20x1.5P	2		
	G1/2	3		
Lever type	Linear (10~70mm)	1		
	Linear (70~150mm)	2		
	Rotary (NAMUR)	5		
Option	None	0		
	With Limit switch and Dome cover (Only for rotary type)	3		
	With Limit switch and LCD	4		

Valve Position Transmitter TS510/TS515 Series

tissin

■ Description

TS510 Series is 2 wire type transmitter which transmits 4 ~ 20 mA DC signal according to changes in valve or damper position.


■ Certified



■ Specifications

Model	TS510	TS515
Connection type	2 Wire	
Supply voltage	9~28V DC	
Output signal	4~20mA DC	
Explosion proof	Ex db IIC T5/T6 Gb Ex tb IIIC T85°C/T100°C Db	
Ingress protection	IP67	
Conduit entry	2 x NPT1/2, NPT3/4, M20, M25	
Ambient Temp.	-40°C~80°C (T5)/-40°C~70°C (T6)	
Linearity	±1% F.S.	
Hysteresis	±0.2% F.S.	
Sensitivity	±0.2% F.S.	
Material	Aluminum die cast	Stainless steel 316
Painting	Polyester powder coating	-
Weight	1.4kg	3.3kg

■ Dimension [Unit:mm]

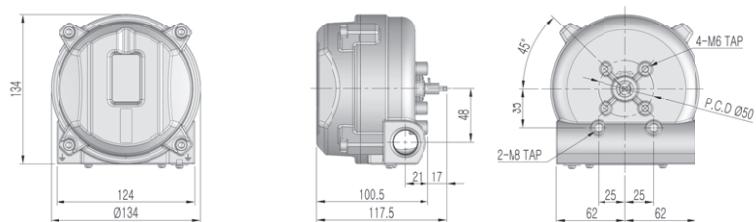

■ Features

- ✚ Flame proof type
- ✚ LCD displays current output signal
- ✚ Easy and simple setting with 2 buttons
- ✚ High accuracy and reliability
- ✚ Two or five points smart setup
- ✚ Limit switch option

■ Product code

Model	TS510				
Material	Aluminum STS 316	TS510 TS515			
Motion type	Linear Rotary	L R			
Explosion proof type	ATEX&IECEx KCS CCC&NEPSI EAC(TR CU)	A K C E			
Conduit entry*	NPT1/2 M20x1.5P NPT3/4 M25x1.5P		1 2 3 4		
Lever type	Linear (10~70mm) Linear (70~150mm) Rotary (NAMUR)			1 2 5	
Option	None With Limit switch and Dome cover (Only for rotary type) With Limit switch and LCD				0 3 4

* TS515 is only available NPT3/4.



Solutions for control valve system

tissin

Tissin Co.,Ltd. (주)티씬

16-5, Hagunsandan 5-ro da-gil, Yangchon-eup,
Gimpo-si, Korea 10049
Tel : +82-31-997-0311, Fax : +82-31-997-4573
www.tissin.co.kr



Version: PC-500EN_06/2025

We reserve the right to make technical changes or modify
the contents of this document without prior notice.

Copyright © 2025 Tissin
All rights reserved.
Printed in Korea